


Supplemental Tire Carrier Install Instructions

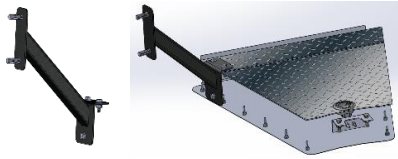

When adding the optional Tire carrier, Use the bolts that come with it for mounting the tongue box hinge plate. You will need to remove the bolt holding the breakaway switch inside your tongue. Use the existing hole as a template and drill from the inside of the frame rail out through the tire carrier. Then reinstall the breakaway switch with the bolt included in the kit.

It is imperative that this bolt is mounted through the side of the tire mount (see enclosed diagram). There is a install video posted on our products video page at www.enhancedperformancesystems.com If you have any questions or issues installing, please contact us through our website and we will walk you through any issues you may encounter.